AIR IS LIFE

AIR IS COMFORT

AIR IS ENERGY

QUALITY AIR FOR LIFE

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of May 2019.
- Due to printing considerations, the actual colours may vary slightly
- All graphics are provided merely for the purpose of illustrating a point.




Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

19RAC0501RZ

Panasonic Australia Pty. Limited

1 Innovation Road, Macquarie Park, NSW 2113 ACN 001 592 187 ABN 83 001 592 187 Website : aircon.panasonic.com.au Authorised Dealer



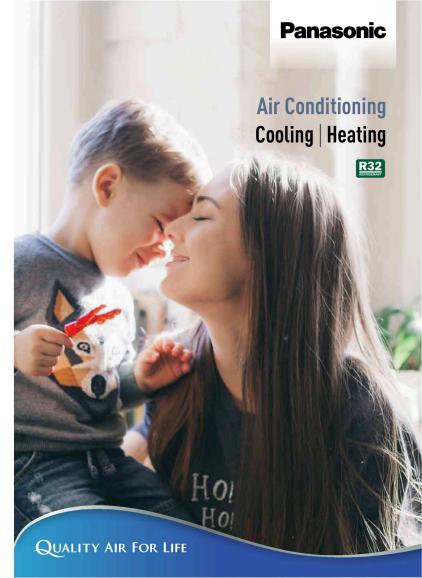





QUALITY AIR FOR LIFE



At Panasonic, we're committed to delivering more than just cooling & heating solutions, we consistently strive to improve the quality of your air, so that you can improve the quality of your life.





Market Leading Connectivity

Control your air in more ways with Panasonic air conditioning's market leading connectivity; now Google Assistant & Amazon Alexa compatible*.

Refer to page 9 for terms and conditions.

*Time of release Quarter 3 2019. Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com,Inc. or its affiliates.

AEROWINGS

Superior Airflow

Panasonic's Air Conditioners utilise AEROWINGS technology to deliver precise control of airflow direction, as well as powerful cooling, for a comfortable environment.







Control, Comfort & Reassurance

As well as a Cool/Warm, comfortable home, a Panasonic air conditioner provides the ultimate peace of mind with our Anti-Bacterial Filter, quiet operation, and our 5 year warranty.



AEROWINGS

Concentrated Airflow, Further

Further and faster airflow across the room.



Concentrated Airflow, Further, **Faster**




- 1 2 Independent Motors Control the Sub-Blade and Bigger Outer Blade separately.
- 2 Sub-Blade Compresses and concentrates cool air.
- Bigger Outer Blade Helps to deliver airflow further.



Powerful Cooling

Featuring twin motorised blades that direct airflow downwards, a concentrated stream of air is delivered to adjust the temperature of the room faster, providing a unique POWERFUL COOLING experience.

Temperature Distribution Test





▶ cooler

Powerful Cooling Concentrated airflow cools room instantly and evenly.

Panasonic Air Conditioners utilise AEROWINGS' twin motorised blade technology to distribute air evenly throughout the room, cooling instantly and evenly. Compared to conventional cooling mechanisms, Panasonic's POWERFUL COOLING technology achieves complete room comfort, fast.

Air Flow


in uneven cooling.

Conventional Cooling

Slow cooling will result

warmer

Air Flow Smoke Test







AEROWINGS directs airflow upwards over wider area then showers down gently and evenly across the room.

Top Air Intake



Hot air is drawn in from the top and cool air is discharged from the bottom to facilitate cool air showering down over the entire area.

A Smarter Way to **Control Your Air**



The Panasonic Comfort Cloud App & WLAN Smart Adaptor deliver convenient control, connectivity and comfort. Seamlessly adjust temperature, monitor energy consumption, change modes, etc. all from just one mobile device*.

Now Google Assistant and Amazon Alexa Compatible*.



SMART Control Control, monitor & analyse up to 200 units in multiple locations from just one device.



SMART Comfort Control your comfort 24 hours a day with remote AC access features, air purification functionality and much more.



SMART Efficiency Analyse and compare energy consumption, improving energy efficiency and cost effectiveness.



SMART Assist Monitor & manage air conditioner troubleshooting effortlessly whilst assigning user control permissions.



Intuitive Voice Control

Introducing intuitive voice control with Google Assistant and Amazon Alexa control compatibility*. Using your existing Google assistant or Alexa devices, control your air conditioner with just your voice.

*C2-TAC61 & updated firmware required.



1. iOS 9.0 or above





Please note: This is not a definitive list of all compatible devices, other similiar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly depending on hardware and software combination.





- **C. JACO JACO JACO SERVICE TO CONTROLL TO THE PROPRIES OF THE PROPRIES AND THE PROPRIES OF TH
- * Wireless LAN Remote Control for Internet Connection required options), network adaptor.
 * Indoor Temperature display and some special function are not available through the App for all models.

* Indeer image displayed may not match with actual unit.

WALL-MOUNTED . AFRO SERIES STANDARD REVERSE CYCLE INVERTER Single -Solit Type



CS-RZ25VKRW | CS-RZ35VKRW | CS-RZ42VKRW



CS-RZ50VKRW | CS-RZ60VKRW | CS-RZ71VKRW | CS-RZ80VKR



Controller

Wireless

Remote

Controller

CZ-RD514C Wired Remoted

Controller [Optional]

-CZ-RD514C

Wired Remoted

Controller (Optional)

ALL CAPACITY AND ENERGY FEEIGIENCY RATINGS.

Running current is at rated conditions (AS3823) and does not include compressor

27°C DB/19°C WB 35°C DB

20°C DB 7°C DB / 6°C WB

ARE BASED ON AS/NZS3823.1.1

start-up or variations in power supply and load conditions.





Adaptor*

(Optional)







| PECIFICA | TIONS | | | | | | | | |
|--|--------------------------|----------------------|---|--|--|--|--|--|--|
| MODEL | - 1 | 240V / 1 Phase / 50H | zl CS-RZ25VKRW | CS-RZ35VKRW | CS-RZ42VKRW | CS-RZ50VKRW | CS-RZ60VKRW | CS-RZ71VKRW | CS-RZ80VKR |
| | | | [CU-RZ25VKR] | ICU-RZ35VKRI | [CU-RZ42VKR] | (CU-RZSOVKR) | [CU-RZ60WKR] | [CU-RZ71VKR] | [CU-RZ90VKR] |
| Cooling / Heating | [min-max] kW | | W 2.50 (0.90-3.00) 3.00 (0.90-3.60) | 3.50 [0.90-3.90] 3.70 [0.90-5.10] | 4.20 [0.90-4.60] 5.10 [0.90-6.80] | 5.00 [0.98-5.60] 5.80 [0.98-7.80] | 6.00 (0.98-6.60) 6.50 (0.98-8.00) | 7.10 [1.70-8.10] 7.50 [1.70-9.90] | 8.00 [2.30-9.00] 9.00 [2.20-11.00] |
| Capacity | [min-max] Btu/h | | h 8,530 (3,070-10,200) 10,200 (3,070-12,300) | 11,900 (3,070+13,300) 12,600 (3,070+17,400) | 14,300 [3,070-15,700] 17,400 [3,070-23,200] | 17,100 [3,340-19,100] 19,900 [3,340-26,600] | 20,500 [3,340-22,500] 22,200 [3,340-27,300] | 24,200 (5,800-27,600) 25,600 (5,800-33,800) | 27,300 (7,840-30,700 30,700 (7,500-37,500 |
| Air Flow | Flow Indoor L/s | | 's 180/185 | 195/213 | 198/213 | 332/339 | 352/352 | 369/400 | 385/400 |
| Dehumidification L/h | | | h 1.5 | 2.0 | 2.4 | 2.8 | 33 | 4.1 | 4.7 |
| Electrical Data | Running Current A | | A 2.60/2.90 | 3.70/3.70 | 5.10/5.90 | 6.70/6.80 | 8.00/8.20 | 9.70/8.80 | 11.50/12.30 |
| Electrical Data | Power Input (min-max) kW | | W 0.57 (0.20-0.89) 0.64 (0.19-1.04) | 0.80 (0.20-1.19) 0.80 (0.19-1.42) | 1.18 (0.25-1.64) 1.36 (0.20-2.04) | 1,47 (0.28-1,73) 1,54 (0.26-2.30) | 1.85 (0.28-2.20) 1.89 (0.28-2.64) | 2.19 (0.45-2.67) 2.06 (0.40-2.85) | 2.48 (0.46-2.98) 2.66 (0.50-3.30) |
| AEER / EER W/W ACOP / COP W/W | | | | 4,31/4,38 4,55/4,63 | 3.52/3.56 3.71/3.75 | 3.37/3.40 3.74/3.77 | 3.22/3.24 3.42/3.44 | 3.22/3.24 3.62/3.64 | 3.21/3.23 3.37/3.38 |
| Star Rating | | | 4.0 4.5 | 4.0 4.5 | 2.5 2.5 | 2.0 2.5 | 1.5 2.0 | 1.5 2.5 | 1.5 2.0 |
| Sound Press Level * dB(A) | ure | Indoor [H / L / Q-L | d 40/25/19 40/27/21 | 44/26/19 | 45/31/29 44/35/28 | 44/34/31 44/33/29 | 46/36/33 46/36/33 | 49/37/34 49/37/34 | 51/38/35 50/38/35 |
| | | Outdoor (H / Q-L | ol 49/- | 49/- 50/- | 457- 51/- | 48/43 49/44 | 49/44 51/46 | 52/47 54/49 | 55/50 55/50 |
| | Ole Level 1 | Indoor (H / L / Q-L | 56/43/37 | 60/42/35 60/45/38 | 61/47/45 80/51/44 | 80/50/47 60/49/45 | 62/52/49 62/52/49 | 65/53/50 65/53/50 | 67/54/51 66/54/51 |
| | Leverup | Outdoor (H / Q-L | 63/- | 65/- | 641- | 63/58 64/59 | 64/59 66/61 | 66/61 68/63 | 69/64 69/64 |
| Net Weight Indoor [Outdoor] kg | | g 8(27) | 8(31) | 81321 | 12034 | 13(36) | 13(50) | 13660 | |
| Dimensions Indoor [HxWxD] mm Outdoor [HxWxD] mm | | | 290 x 799 x 197 542 x 780 x 289 | 290 x 799 x 197 619 x 824 x 299 | 302 x 1,102 x 244 619 x 824 x 299 | 302 x 1,102 x 244 619 x 824 x 299 | 302 x 1,102x 244 695 x 875 x 320 | 302 x 1,102 x 244 795 x 875 x 320 | |
| Refrigerator Pipe | Liquid Side mm/(inch) | | hl #6.35 [1/4] | e 6.35 (1/4) | a 6.35 (1/4) | s 6:35 [1,/4] | e 6.35 [1/4] | e 6.35 [1/4] | a 6.35 (1/4) |
| Diameter | Gas Side mm/[inch] | | hl 69.52 (3/8) | a 9.52 (3/8) | s 12.70 10/20 | a 12.70 [1/2] | ø 12.70 [1/2] | ø 15.88 (5/8) | s 15.88 (5/8) |
| Pipe Extension Length min-max [m] | | | n] 3-20 | 3-20 | 3-20 | 3-30 | 3-30 | 3-30 | 3-30 |
| Maximum Elevation Length m | | | m 15 | 15 | 15 | 15 | 15 | 20 | 20 |
| Pipe Length For Additional Gas m | | | m 7.5 | 7.5 | 7.5 | 10 | 10 | 10 | 10 |
| Additional Gas Ami | ount | g/ | m 10 | 10 | 10 | 15 | 15 | 25 | 25 |
| Power Supply | | | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor | Outdoor |
| Operating Range (Outdoor) Cooling Begree °C | | | C -10 ~ +46 -15 - +24 | -10 ~ +46 -15 - +24 | -10 ~+46 -15 ~+24 | -10 ~ +66 -15 - +24 | -10 ~ +65 -15 -+24 | -10 - +46 -15 -+24 | -10 ~ +46 -15 - +24 |
| Refrigerant Type | | | R32 | R32 | R32 | R32 | R32 | R32 | R32 |

[&]quot;Indoor temperature display and some special function are not available through the App for all models.

SPECIFICATIONS & FEATURES

Products in this brochure contain R32 refrigerant. Please refer to Panasonic's installation instructions

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required.

Future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your deater.



Cooling []: Outdoor Unit EER: Cooling Efficiency

| Heating | CUP: Heating Emidency |
|---------|-----------------------|
| | |
| T. | T. |

24-HOUR DUAL ON & OFF REAL SETTING TIMER

DEMAND RESPONSE ENABLING

DEVICE [DRED]

BLUE FIN CONDENSER

ANTI-BACTERIAL FILTER

FEATURES EXPLANATION

INVERTER CONTROL

Varies the rotation speed of the compressor for higher energy savings.

Allows you to run the fan without any cooling or heating, thus giving just ventilation.

SOFT DRY OPERATION MODE

AUTO CHANGEOVER (INVERTER)

(D24 This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.

3RD PARTY CONNECTIVITY Allows limited control from an external source when wired to do so.

ECO MODE

MANUAL HORIZONTAL

AIRFLOW DIRECTION CONTROL

PERSONAL AIRFLOW CREATION

* CS-RZSEWCRW, CS-RZSEWCRW, CS-RZFTV NRW & CS-RZSEVWR only

ODOUR-REMOVING FUNCTION

CLEAN & HEALTHY AIR

~

ENN MODE

Ø

*--0--%

DRED

LCD WIRELESS REMOTE CONTROL

WIRELESS LAN REMOTE CONTROL -

FOR INTERNET CONNECTION (OPTIONAL) * Network adaptor (CZ-TACG1) is required

WIRED REMOTE CONTROL (OPTIONAL)

For use in commercial applications, or where users don't want a remote control.

RELIABILITY

*20m - CS-RZZSVKRW, CS-RZSSVKRW, CS-RZAZVKRW *30m - CS-RZSOVKRW, CS-RZADVKRW, CS-RZZSOVKR

Ö

TOP-PANEL MAINTENANCE ACCESS

SELE-DIAGNOSTIC FUNCTION

Should a malfunction occur, the unit diagnoses the problem and shows the corresponding

'oi'

S

0---

三

B()

POWERFUL MODE

QUIET MODE

(UP & DOWN)

Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.

AIRELOW DIRECTION CONTROL

REMOVABLE, WASHABLE PANEL

Gives you easy access to the filter as well mai the unit easy to clean.

(Q.)

@ made

-- !

100

PANDOM AUTO RESTART When multiple units are connected and there is power outage, they will turn on at different times in order to not spike the power supply.









OUTDOOR

















CU-RZ25VKR CU-RZ35VKR

CU-RZ42VKR CU-RZ50VKR CU-RZ60VKR

CU-RZ71VKR

CU-RZ80VKR

10 11

² Sound pressure level specification is measured according to JIS C9612.